

# MOTOR BOAT SUPPORTS

The **Light Weight Support** is designed for small craft up to 6 tons displacement where the distance from the ground to the underside of the chine is no more than 3'3" (100cms).

The **Standard Support** weighs just 15kg and can be easily manoeuvred by one person. The angle of the hull pad is fully adjustable and the height can be raised from a minimum 87cms to a maximum 127cms. Four supports are sufficient for a craft of up to 30 feet and further supports can then be added for larger vessels as required. For example, we would recommend six supports for a 36 foot 10 ton craft and eight for a 40 foot 12 ton vessel.

The **Heavy Duty Support** is designed for motor boats above 15 tons displacement. These even more powerful supports extend from 117cms up to 210cms to take larger craft, they weigh 22kg each. With these supports just four are needed for a 40 foot boat and our recommendations are for 6 at 50 foot / 15 tons and 8 at 60 foot / 20 tons.

All models are of steel construction and galvanized to BS 729



## PB 6 LIGHT WEIGHT SUPPORT

- Minimum height 70cms (2'3") - Maximum 100cms (3'3")
- Weight per unit 10 kilos
- Pad size 250mm x 125mm with protective hull covering
- Fully pivoting to suit all hull contours
- Stackable (nests) for easy freight and storage

## PB 10 STANDARD SUPPORT

- Minimum height 87cms (2'10") - Maximum 127cms (4'2")
- Weight per unit 15 kilos
- Pad size 375mm x 150mm with protective hull covering
- Fully pivoting to suit all hull contours
- Attachment points to allow interlinking of units with chain or webbing

## PB 20 HEAVY DUTY SUPPORT

- Minimum height 117cms (3'10") - Maximum 210cms (6'10")
- Weight per unit 22 kilos
- Pad size 400mm x 200mm with protective cover and fully pivoting head
- Stackable
- Suitable for Motor Boats over 15 tons displacement
- Attachment points to allow linking by chain or webbing to provide additional stability

## KB 1 Keel Base Stand

- Minimum height 50cms (20") - Maximum 67cms (26")
- Weight per unit 27 kilos
- Pad size 250mm x 250mm
- Safe working load 5 tons per stand

### OPTIONAL EXTRAS AVAILABLE

- Bow Support "V" pads
- Heavy Weather Lashing Kits



THE YACHT LEG & CRADLE COMPANY LTD

Hamilton House, 70 Reading Road, Henley-on-Thames, Oxfordshire, RG9 1AU, England

T +44 (0) 8700 100577 F +44 (0) 8700 100599  
 e-mail sales@yachtlegs.co.uk  
 website www.yachtlegs.co.uk



## YACHT CRADLES



THE YACHT LEG & CRADLE COMPANY LTD

Hamilton House, 70 Reading Road  
 Henley-on-Thames, Oxon  
 RG9 1AU, England

T +44 (0) 1491 636293  
 F +44 (0) 1491 636313  
 e-mail sales@yachtlegs.co.uk  
 www.yachtlegs.co.uk



# YACHT CRADLES

Three types of yacht cradles are available, namely Transportable, Stackable, and Extra Large. Transportable cradles are designed for boatowners who need to remove the cradle from site when not in use. They are modular and can be extended with additional keel base and arm sections.


## BOATOWNER TRANSPORTABLE




Model TC2

LONGEST SECTION 2.20m

BOAT DIMENSIONS		CRADLE MAX-MIN DIMS		
MODEL	DRAFT	PADS	W	H
TC2	6'6" / 2.00m	2	2.00 1.50	2.00 1.50

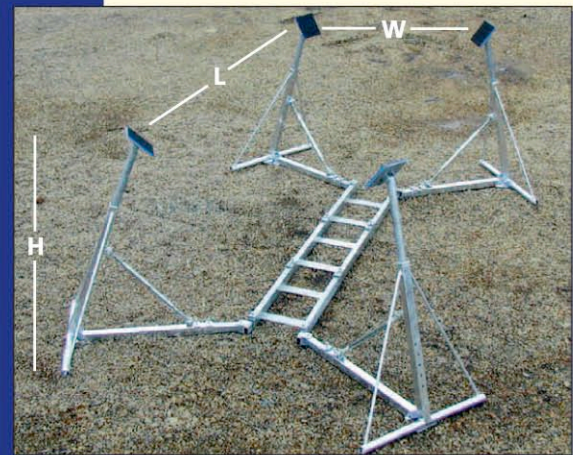

Model TC7

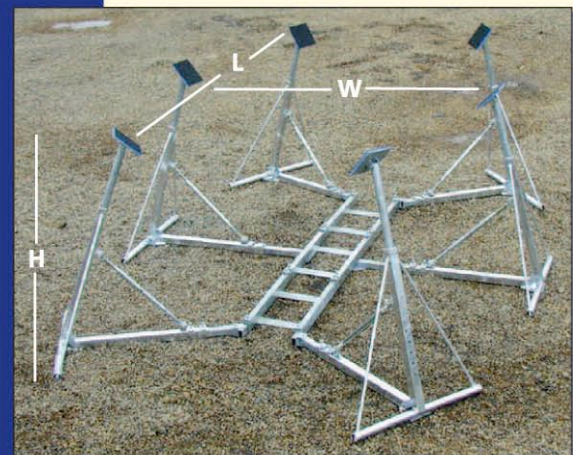

Model TC9

LONGEST SECTION 1.20m

BOAT DIMENSIONS		CRADLE MAX-MIN DIMS					
MODEL	TONS	LENGTH	DRAFT	PADS	L	W	H
TC5	5	26' / 8.00m	6'0" / 1.80m	4	2.70m 2.00m	3.00 1.30	1.90 1.34
TC7	10	36' / 11.00m	6'6" / 2.00m	4	3.70m 3.00m	3.00 1.30	2.00 1.34
TC9	15	42' / 12.80m	6'6" / 2.00m	6	3.70m 3.00m	3.90 1.30	2.00 1.34


## BOATYARD STACKABLE



Model SC65

PACKED DIMENSIONS			
SC65	3.50m x 1.37m x 0.14m	485kg	
SC85	3.50m x 1.37m x 0.14m	495kg	
SC95	4.60m x 1.37m x 0.14m	600kg	


BOAT DIMENSIONS				CRADLE MAX-MIN DIMS			
MODEL	TONS	LENGTH	DRAFT	PADS	L	W	H
SC65	10	38' / 11.50m	6'0" / 1.80m	4	4.90m 3.50m	3.30 1.25	1.80 1.40
SC85	15	42' / 12.80m	6'6" / 2.00m	4	4.90m 3.50m	4.00 1.95	2.40 1.90
SC95	20	46' / 14.00m	6'6" / 2.00m	6	5.90m 4.60m	4.00 1.95	2.40 1.90

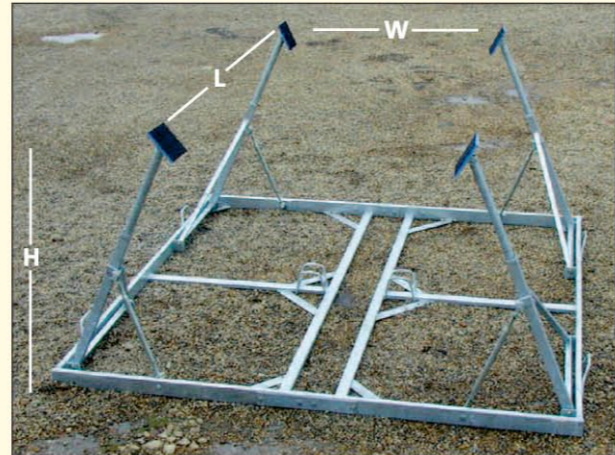

Model DB40

PACKED DIMENSIONS			
DB40	3.70m x 1.85m x 0.24m		
DB45	4.70m x 1.85m x 0.24m		
DB50	4.70m x 1.85m x 0.24m		
DB55	5.70m x 2.15m x 0.24m		

BOAT DIMENSIONS				CRADLE MAX-MIN DIMS			
MODEL	TONS	LENGTH	DRAFT	PADS	L	W	H
DB40	10	36' / 11.00m	6'0" / 1.80m	4	3.35m	3.00 1.20	2.00 1.00
DB45	12	40' / 12.00m	6'6" / 2.00m	4	4.35m	3.00 1.20	2.00 1.34

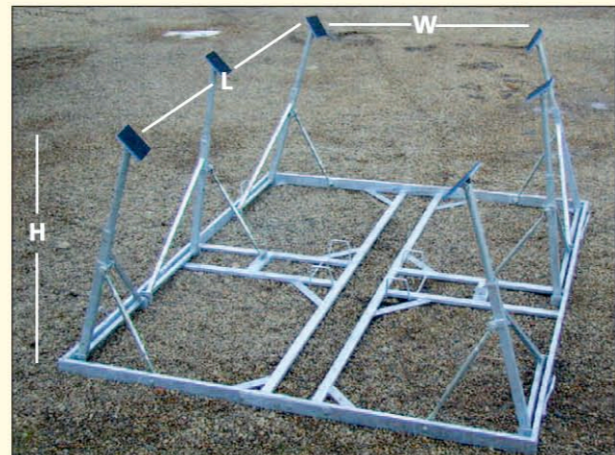

Model DB50

BOAT DIMENSIONS				CRADLE MAX-MIN DIMS			
MODEL	TONS	LENGTH	DRAFT	PADS	L	W	H
DB50	16	44' / 13.40m	6'6" / 2.00m	6	4.35m	3.00 1.20	2.00 1.00
DB55	22	54' / 16.50m	9'0" / 2.75m	6	5.35m	3.20 2.40	2.75 1.70

Two new galvanised steel yacht cradles, designed for yachts between 40' – 75' length overall. Modular cradles are for use with boatmovers, Knock Down cradles to be used with boat hoists.

## EX LARGE MODULAR CRADLE



Model MC3

BOAT DIMENSIONS				
MODEL	TONS	LENGTH	DRAFT	PADS
MC3	25	45' / 13.70m	8' / 2.44m	6
MC4	30	55' / 16.76m	8'6" / 2.6m	8
MC5	40	65' / 19.80m	10'0" / 3.0m	8



Model MC5

- For use with boat movers - allows for close positioning of yachts
- Modular design - easy to assemble on site
- Will support yachts up to force 12 (steady 80mph) gusting 134mph using ground anchors
- 8 arm cradle - weight 1125 kg (2475lbs)
- All necessary webbing supplied

## EX LARGE K.D. CRADLE



Model XLKD

- For use with boat hoists
- Supplied in knock down form for erection on site

SIZE		
XLKD	8.0m x 4.0m	1700kg
XXLKD	10.0m x 5.0m	2300kg

BOAT DIMENSIONS				
MODEL	TONS	LENGTH	DRAFT	PADS
XLKD	30	55' / 16.76m	8'6" / 2.60m	6
XXLKD	45	75' / 22.80m	10' / 3.00m	8

